


PBLC-M

BALL-LOCK RECEPTACLE



Stainless Steel

IMAO

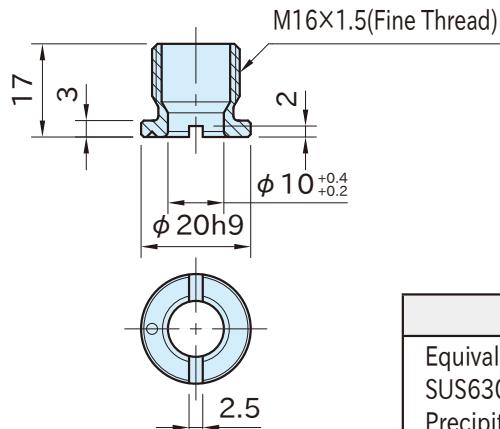

Body
Equivalent to SUS630 stainless steel Precipitation hardened

Part Number	Proper Plate Thickness	Weight (g)	Proper Pneumatic Ball-Locking Clamps
PBLC-M16-SUS	6 or more	13	PBLC1023S-SUS, PBLC1023A-SUS

※Note: Spacing tolerance for multiple use should be ± 0.1 .

Refer to the product pages of clamps for repeatability.

Note

Color difference by the hardening treatment does not affect function or quality of the product.

How To Install

Hole Preparation

Plate thickness: 6mm to 10mm



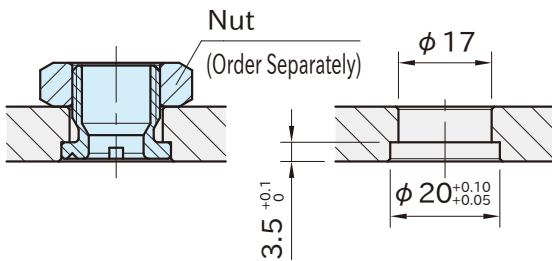


Plate thickness: over 10mm

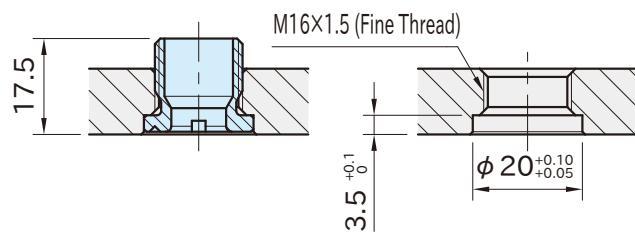


Order Separately Nut (Stainless Steel)



Part Number
NDX16-NUT-SUS

Order Separately Installation Wrench



Part Number
PW16